




**ATC3600Y**

**Product Features:**

- 8.3-oz, 100% ringspun polyester jersey with wicking technology
- UV protection = UPF 38+

Youth sizes: XS(2-4), S(6-8), M(10-12), L(14-16), XL(18-20)

**Icons/Fabric Features:**

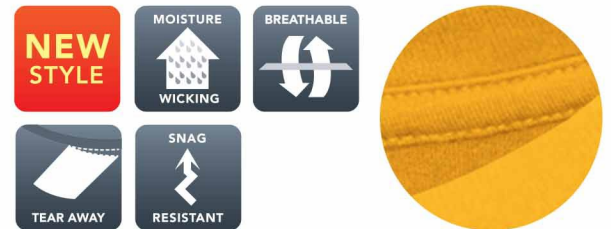

**Available Colours and PMS Colours**

*Textile fabric colours are subject to dye lot variation and will not be exact match to print pantone reference*



Due to the nature of polyester, special care must be taken throughout the decoration process.

## ATC3600Y - ATC™ Pro Spun™ Youth Tee

### GARMENT MEASUREMENTS

| Size                           | XS      | S       | M       | L       | XL      |
|--------------------------------|---------|---------|---------|---------|---------|
| Chest - <i>Half Measure</i>    | 16"     | 17"     | 18"     | 19"     | 20"     |
| Chest - <i>Full Measure</i>    | 32"     | 34"     | 36"     | 38"     | 40"     |
| Body Length from HPS (At back) | 20 1/2" | 22"     | 23 1/2" | 25"     | 26 1/2" |
| Sleeve Length-CB               | 13 1/2" | 14 1/2" | 15 1/2" | 16 1/2" | 17 1/2" |

*Finished measurements in inches. Refer to "How to Measure" guide for detailed information on measurement instructions.*

### YOUTH General Sizing Guide

| Size             | XS              | S           | M               | L           | XL          |
|------------------|-----------------|-------------|-----------------|-------------|-------------|
| Numeric Size     | 2-4             | 6-8         | 10-12           | 14-16       | 18-20       |
| Chest            | 24"-26"         | 26"-28"     | 28"-30"         | 30"-32"     | 32"-35"     |
| Waist            | 22 1/2"-23 1/2" | 23"-24 1/2" | 24 1/2"-25 1/2" | 25 1/2"-27" | 27"-29"     |
| Sleeve Length-CB | 24"-25"         | 25"-26"     | 26"-27 1/2"     | 27 1/2"-29" | 29 1/2"-31" |



## DECORATING INSTRUCTIONS FOR PRO SPUN STYLES

### GENERAL:

- Pro Spun feels very much like cotton, but is 100% Polyester.
- 100% polyester is heat sensitive and cannot exceed temperature thresholds higher than 320 degrees or shrinkage, bleeding or spot staining may occur.
- Polyester requires a longer cooling time than cotton. Avoid overlap of garments and decoration until garments are cooled. Failure to cool the fabric prior to stacking into a printer's fold may cause the fabric and applied decoration to stick together.
- Recommended decorations: Screenprinting, Heat Transfer, Embroidery
- Direct to garment (DTG) is primarily used on cotton fabrics. Check with your supplier for information on requirements for DTG process on 100% polyester.

### SCREEN PRINTING:

- Work with your ink supplier to select the correct ink for your project. We recommend using low cure materials and a grey barrier base bleed blocker, especially on dark colors.
- When screen printing on 100% polyester, be sure to monitor the heat at flash and dryer temperatures.

### HEAT TRANSFERS:

- Work with your heat transfer supplier to select the correct ink for your project. We recommend using an anti-migration layer in the designs.
- Check with your heat transfer machine supplier to determine correct temperature, time and pressure for your project.